



Zytel® 70K20HSL BK284

NYLON RESIN

Zytel® 70K20HSL BK284 is a 20% Kevlar® Fiber Reinforced, Heat Stabilized, Polyamide 66

Product information

Resin Identification	PA66-RF20	ISO 1043
Part Marking Code	>PA66-RF20<	ISO 11469
ISO designation	ISO 16396-PA66,AF20,M1CGHR,S14-050	

Rheological properties

	dry/cond.		
Moulding shrinkage, parallel	0.9/-	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.4/-	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile Modulus	5300/3500	MPa	ISO 527-1/-2
Stress at break	110/85	MPa	ISO 527-1/-2
Strain at break	5/7.2	%	ISO 527-1/-2
Charpy impact strength, 23°C	50/65	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6/9	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.35/0.37	-	

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	263/*	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	80/-	°C	ISO 11357-1/-2
Temp. of deflection under load, 1.8 MPa	222/*	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	255/*	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	240/*	°C	ISO 306
Coeff. of linear therm. expansion, parallel	47/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	75/*	E-6/K	ISO 11359-1/-2

Flammability

	dry/cond.		
Glow Wire Flammability Index, 1mm	750/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 2mm	750/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	960/-	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 1mm	750/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 2mm	750/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	750/-	°C	IEC 60695-2-13
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80	mm/min	ISO 3795 (FMVSS 302)



Zytel® 70K20HSL BK284

NYLON RESIN

Electrical properties

	dry/cond.		
Dissipation factor, 100Hz	140/-	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	140/-	E-4	IEC 62631-2-1
Volume resistivity	1E9/-	Ohm.m	IEC 62631-3-1
Surface resistivity	*/>1E15	Ohm	IEC 62631-3-2
Electric strength	23/-	kV/mm	IEC 60243-1

Other properties

	dry/cond.		
Humidity absorption, 2mm	2.7/*	%	Sim. to ISO 62
Water absorption, 2mm	6.8/*	%	Sim. to ISO 62
Density	1190/-	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Max. screw tangential speed	0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	3 s/mm
Back pressure	As low as possible MPa
Ejection temperature	210 °C

Characteristics


Additives	Release agent, Glass fibre
-----------	----------------------------



Zytel® 70K20HSL BK284

NYLON RESIN

Stress-strain (dry)

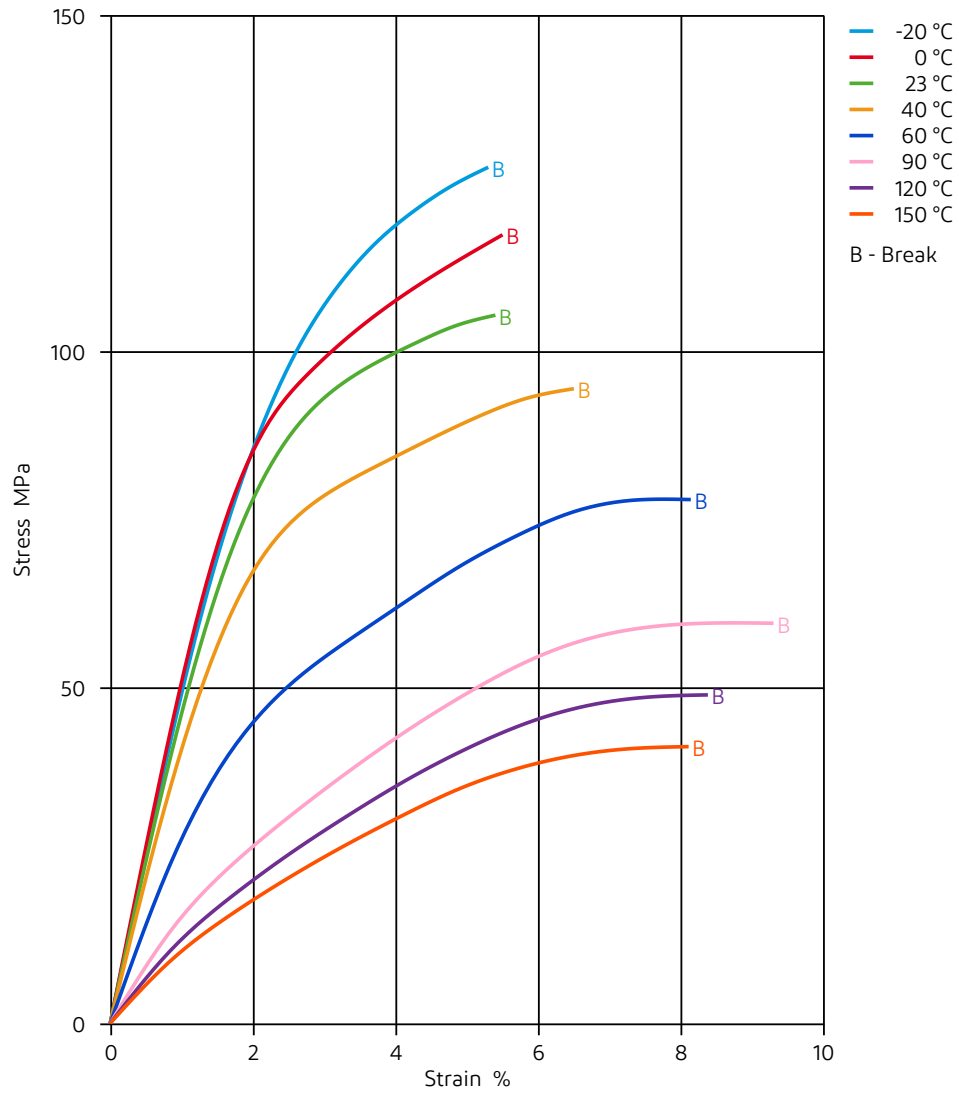




Zytel® 70K20HSL BK284

NYLON RESIN

Stress-strain (cond.)

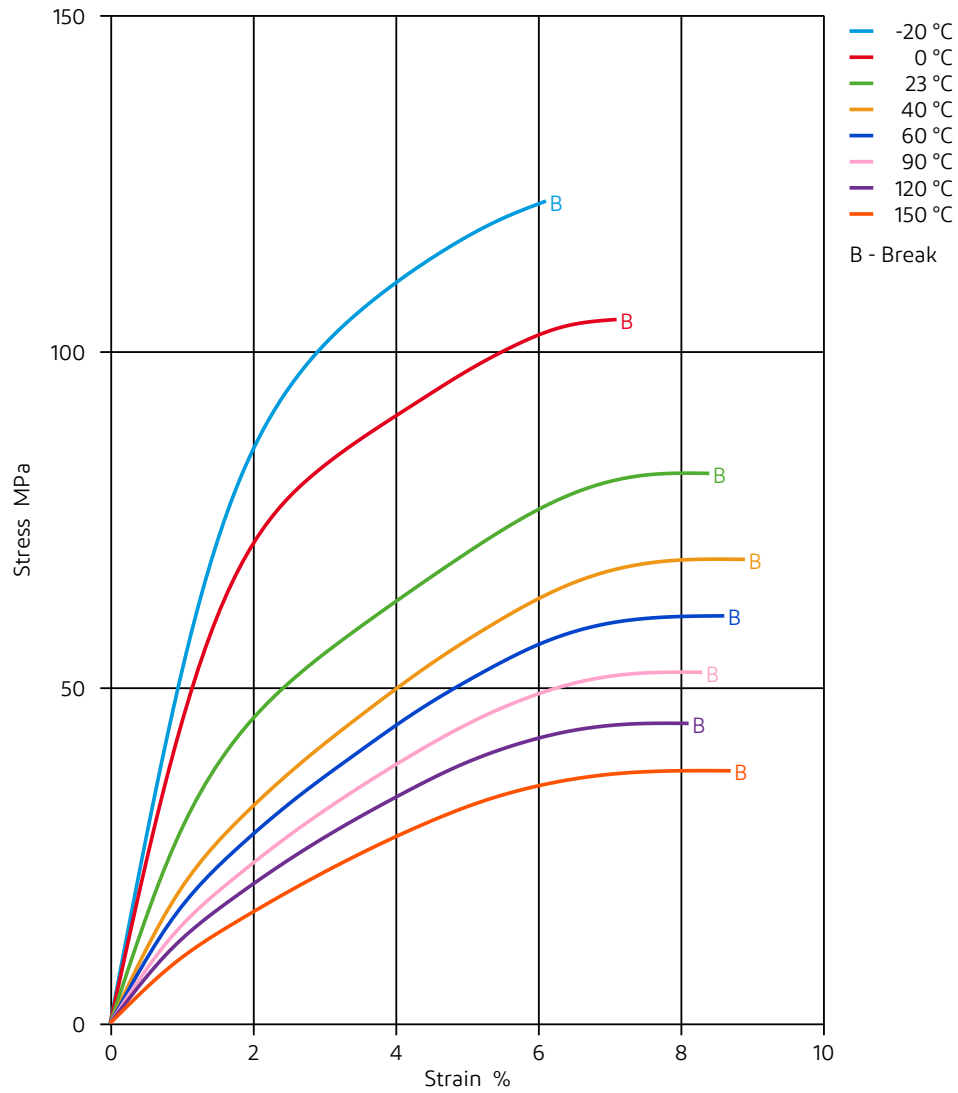




Zytel® 70K20HSL BK284

NYLON RESIN

Secant modulus-strain (dry)

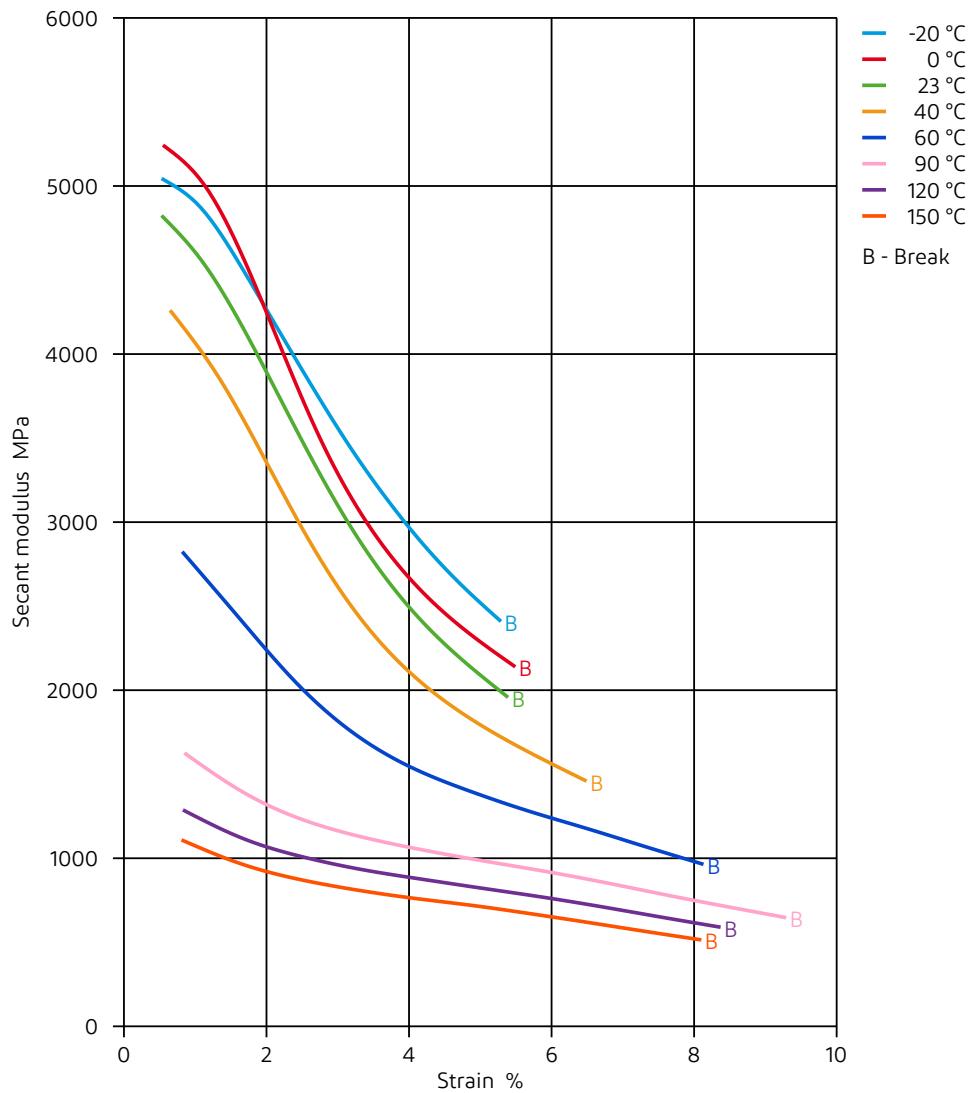




Zytel® 70K20HSL BK284

NYLON RESIN

Secant modulus-strain (cond.)

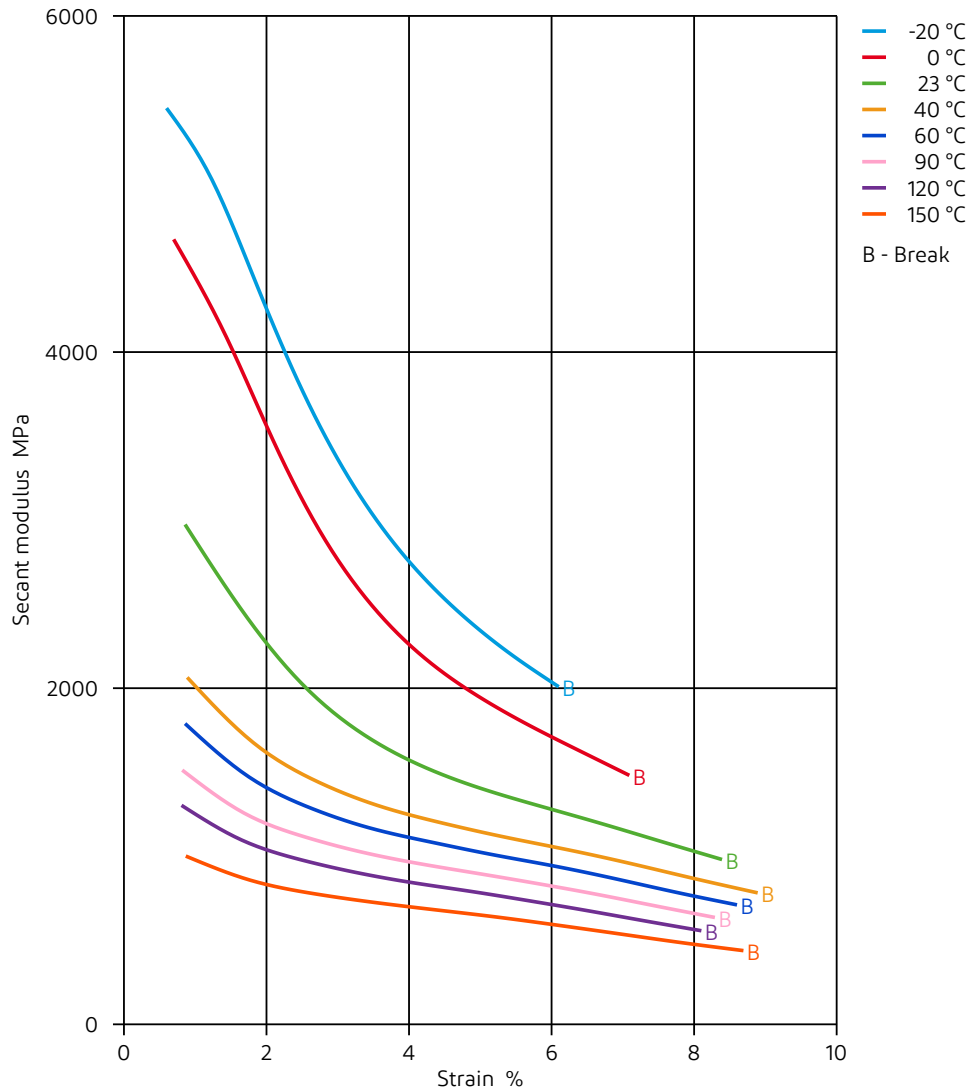

Revised: 2019-08-02

Page: 6 of 6

dupont.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

© 2021 DuPont. All rights reserved.