



Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow molding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants. Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® G4774 is a medium modulus grade with nominal hardness of 47D. It contains discoloring stabilizer. It can be processed by many conventional thermoplastic processing techniques like injection molding and extrusion.

Typical applications:

Hose and tubing, wire and cable jackets, film and sheeting, profiles and moulded products. Not suited for light-colored finished products.

Product information

Resin Identification	TPC-ET	ISO 1043
Part Marking Code	>TPC-ET<	ISO 11469

Rheological properties

Melt volume-flow rate	11 cm ³ /10min	ISO 1133
Melt mass-flow rate	11 g/10min	ISO 1133
Temperature	230 °C	ISO 1133
Load	2.16 kg	ISO 1133
Melt mass-flow rate, Temperature	230 °C	ISO 1133
Melt mass-flow rate, Load	2.16 kg	ISO 1133
Moulding shrinkage, parallel	1.5 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.2 %	ISO 294-4, 2577



Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Typical mechanical properties

Tensile Modulus	110 MPa	ISO 527-1/-2
Stress at 10% strain	7 MPa	ISO 527-1/-2
Stress at 50% strain	12 MPa	ISO 527-1/-2
Stress at break	17 MPa	ISO 527-1/-2
Nominal strain at break	400 %	ISO 527-1/-2
Strain at break	200 %	ISO 527-1/-2
Flexural Modulus	111 MPa	ISO 178
Shear Modulus	39 MPa	ISO 6721
Charpy impact strength, 23°C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	120 kJ/m ²	ISO 179/1eA
Tensile notched impact strength, 23°C	260 kJ/m ²	ISO 8256/1
Izod notched impact strength, 23°C	N kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	N kJ/m ²	ISO 180/1A
Brittleness temperature	-66 °C	ISO 974
Shore D hardness, 15s	43 -	ISO 48-4
Shore D hardness, max	48 -	ISO 48-4
Tear strength, parallel	100 kN/m	ISO 34-1
Tear strength, normal	90 kN/m	ISO 34-1
Abrasion resistance	33 mm ³	ISO 4649

Thermal properties

Melting temperature, 10°C/min	208 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	-45 °C	ISO 11357-1/-2
Temp. of deflection under load, 0.45 MPa	60 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 10N	165 °C	ISO 306
Coeff. of linear therm. expansion, parallel	220 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	190 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.16 W/(m K)	
Eff. thermal diffusivity	5.44E-8 m ² /s	
Spec. heat capacity of melt	2100 J/(kg K)	
RTI, electrical, 0.75mm	50 °C	UL 746B
RTI, electrical, 1.5mm	50 °C	UL 746B
RTI, electrical, 3mm	50 °C	UL 746B
RTI, impact, 0.75mm	50 °C	UL 746B
RTI, impact, 1.5mm	50 °C	UL 746B
RTI, impact, 3mm	50 °C	UL 746B
RTI, strength, 0.75mm	50 °C	UL 746B
RTI, strength, 1.5mm	50 °C	UL 746B
RTI, strength, 3mm	50 °C	UL 746B



Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes -	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	3 mm	IEC 60695-11-10
UL recognition	yes -	UL 94
Glow Wire Flammability Index, 2mm	700 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 2mm	675 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 2mm	650 °C	IEC 60335-1
FMVSS Class	B -	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	33 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 1MHz	4.7 -	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Comparative tracking index, 3.0mm	600 PLC	UL 746A

Other properties

Density	1190 kg/m ³	ISO 1183
Density of melt	1010 kg/m ³	
Water Absorption, Immersion 24h	2.5 %	Sim. to ISO 62

VDA Properties

Emission of organic compounds	18 µgC/g	VDA 277
Odour	5 class	VDA 270

Injection

Drying Recommended	yes
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.08 %
Melt Temperature Optimum	240 °C
Min. melt temperature	235 °C
Max. melt temperature	260 °C
Mold Temperature Optimum	45 °C
Min. mould temperature	45 °C
Max. mould temperature	55 °C



Hytrel[®] G4774


THERMOPLASTIC POLYESTER ELASTOMER

Extrusion

Processing Moisture Content
Melt Temperature Optimum

≤0.06 %
230 °C

Viscosity-shear rate

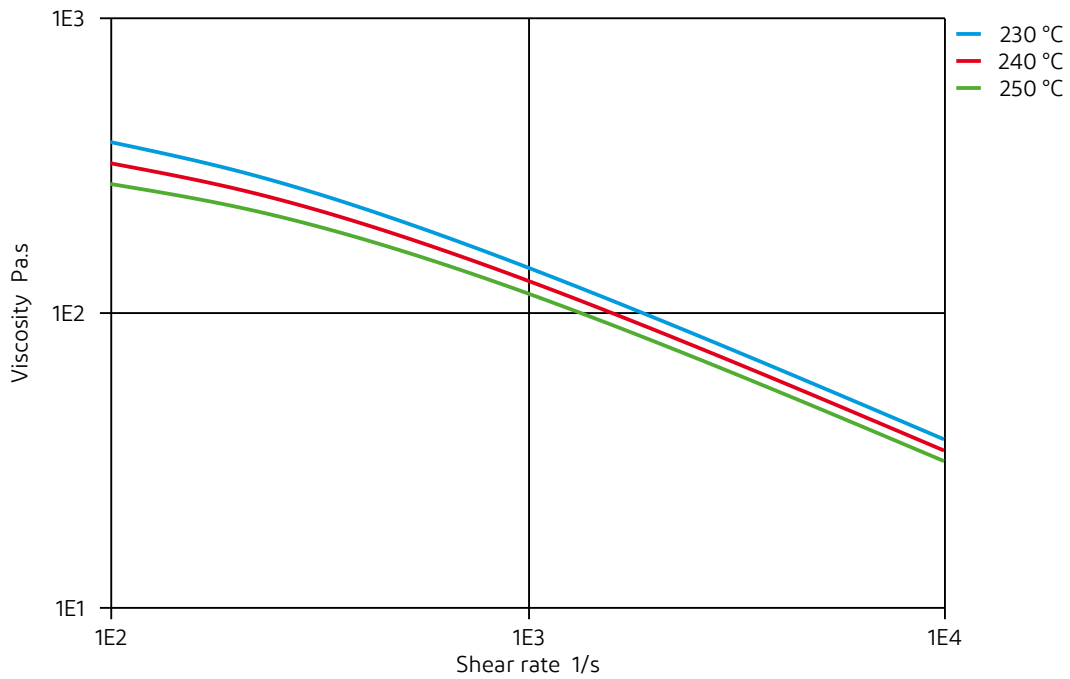




Hytrel[®] G4774

THERMOPLASTIC POLYESTER ELASTOMER

Shearstress-shear rate

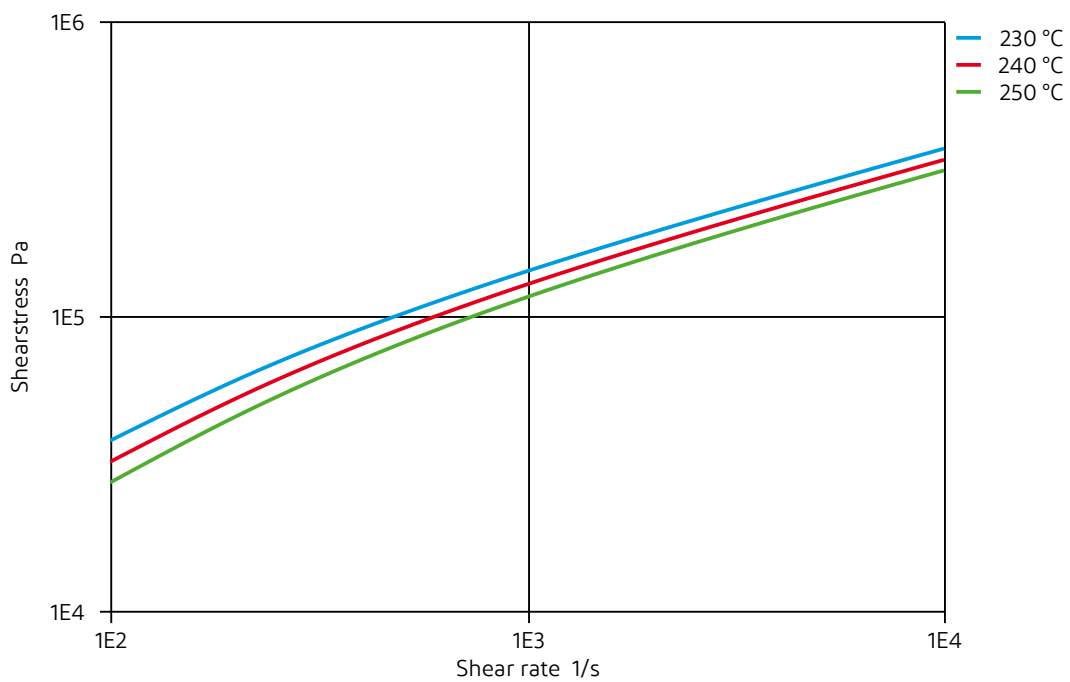




Hytrel[®] G4774

THERMOPLASTIC POLYESTER ELASTOMER

Dynamic Tensile modulus-temperature

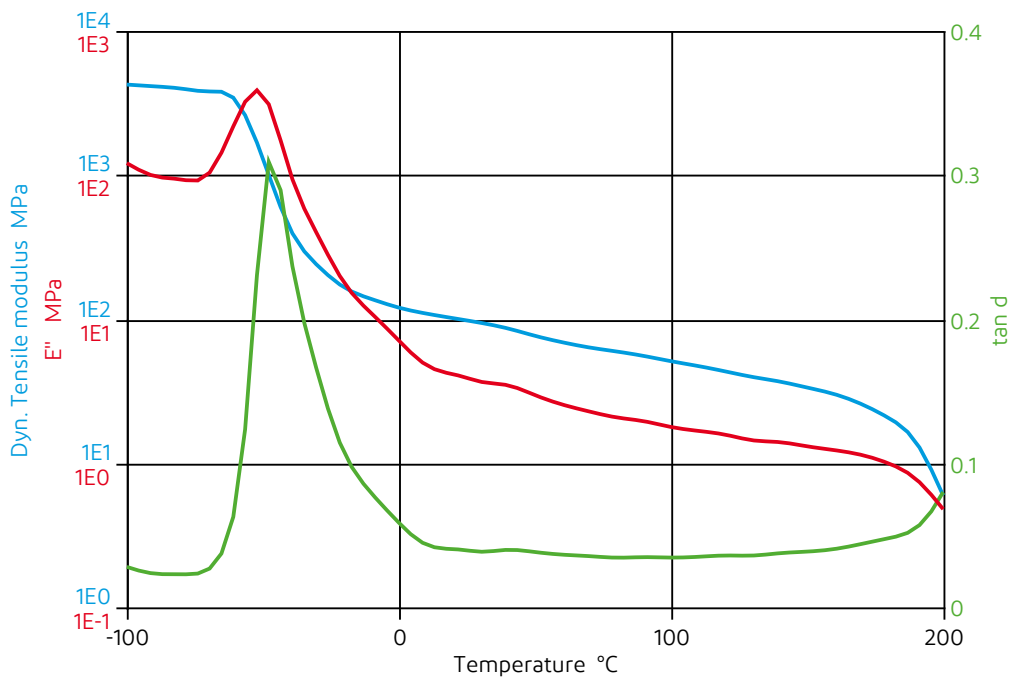




Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Stress-strain

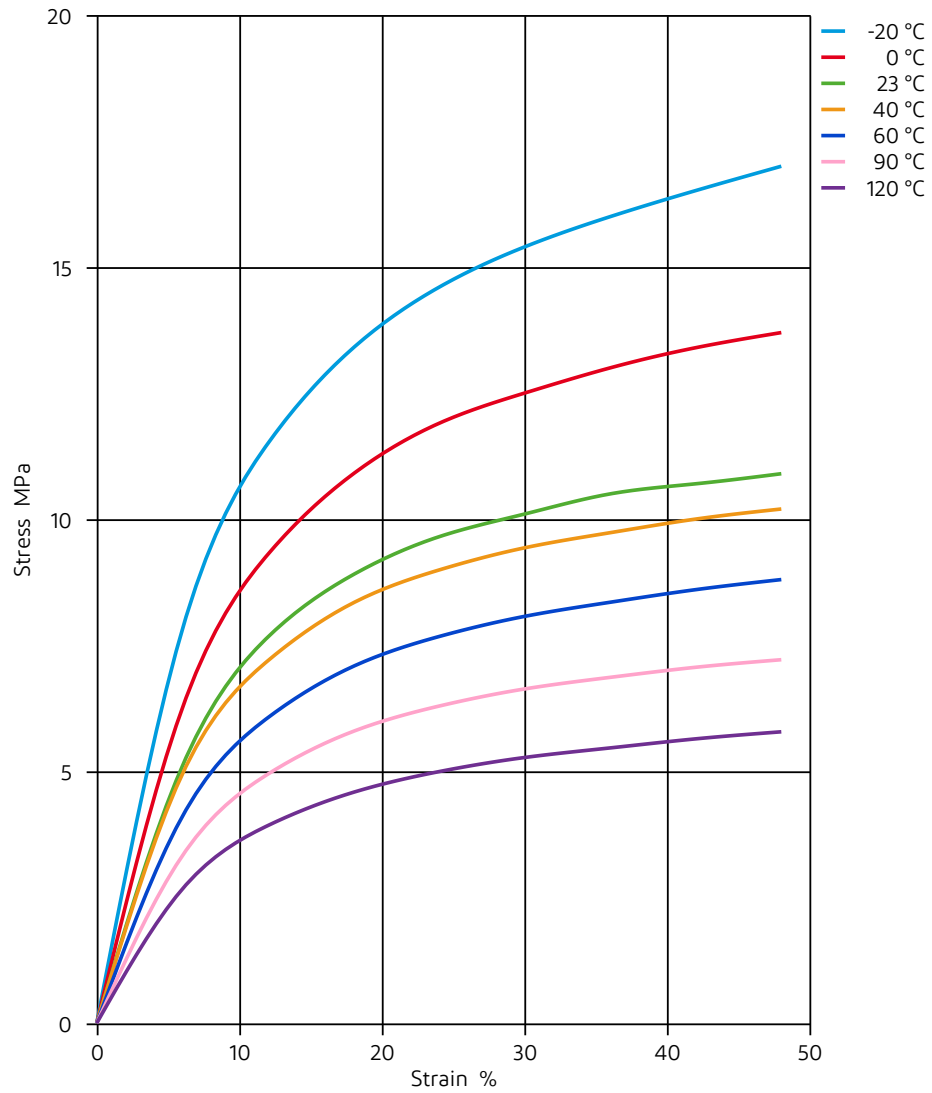




Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER


Secant modulus-strain

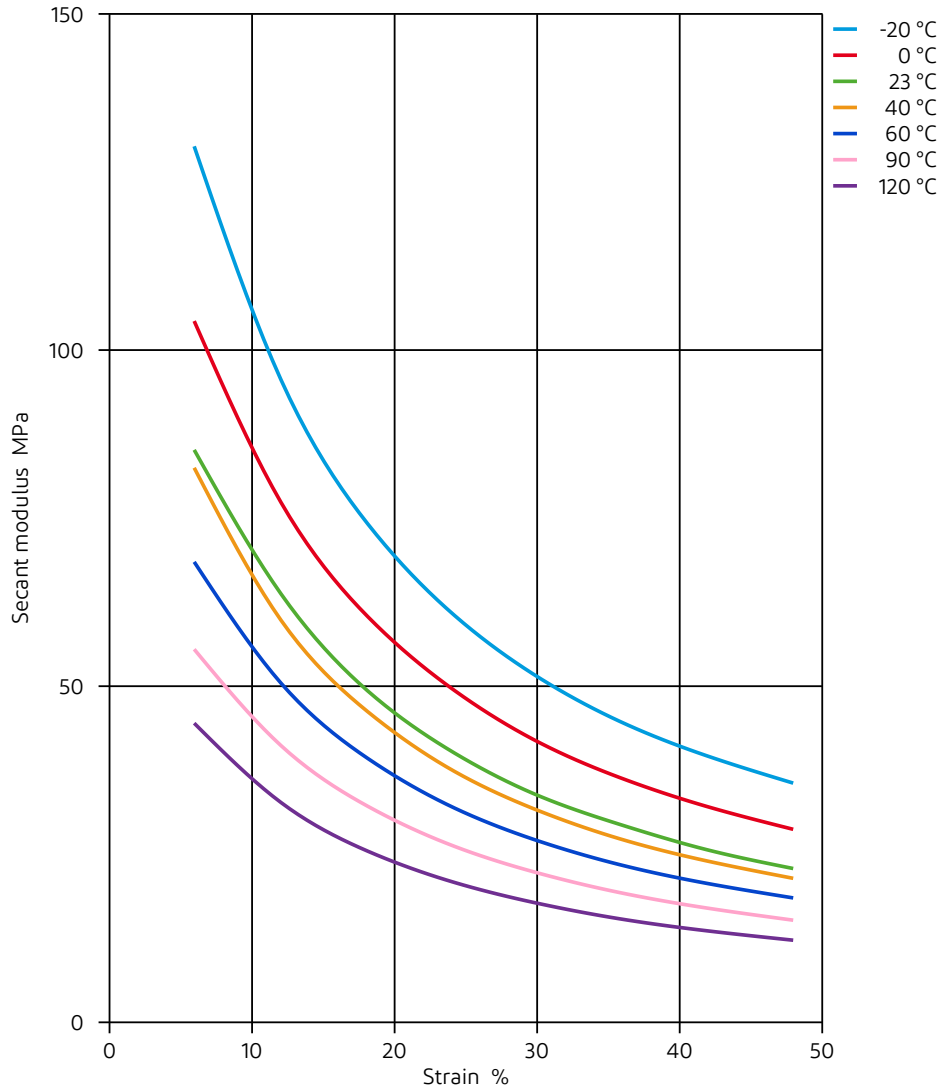

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Specific volume-temperature (pvT)

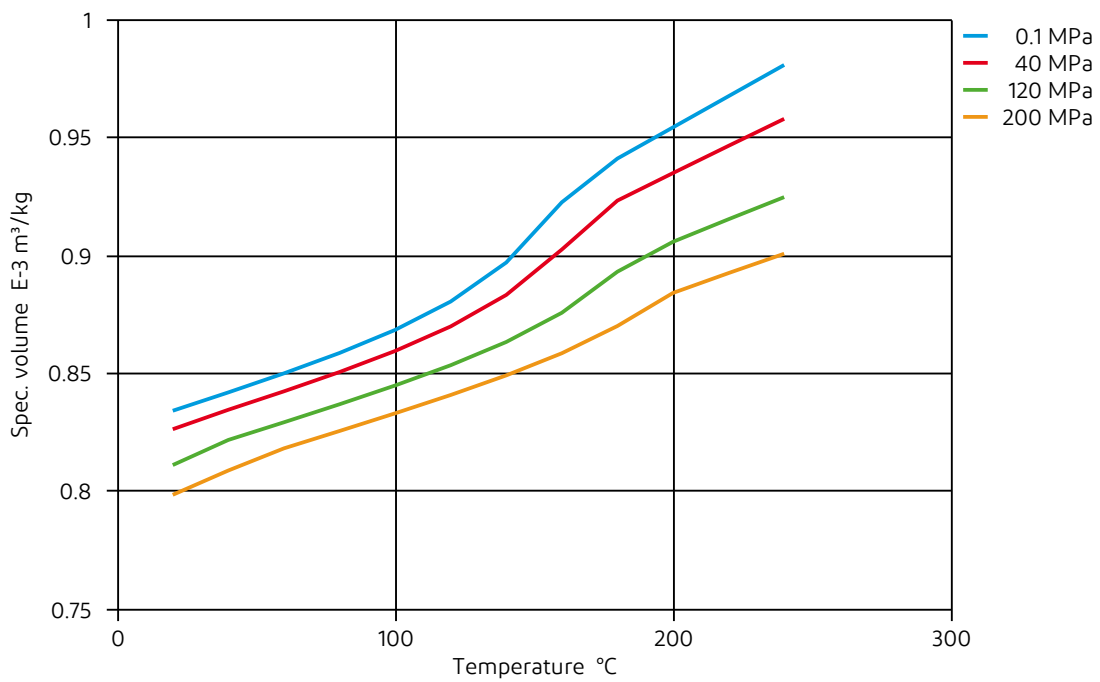




Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)

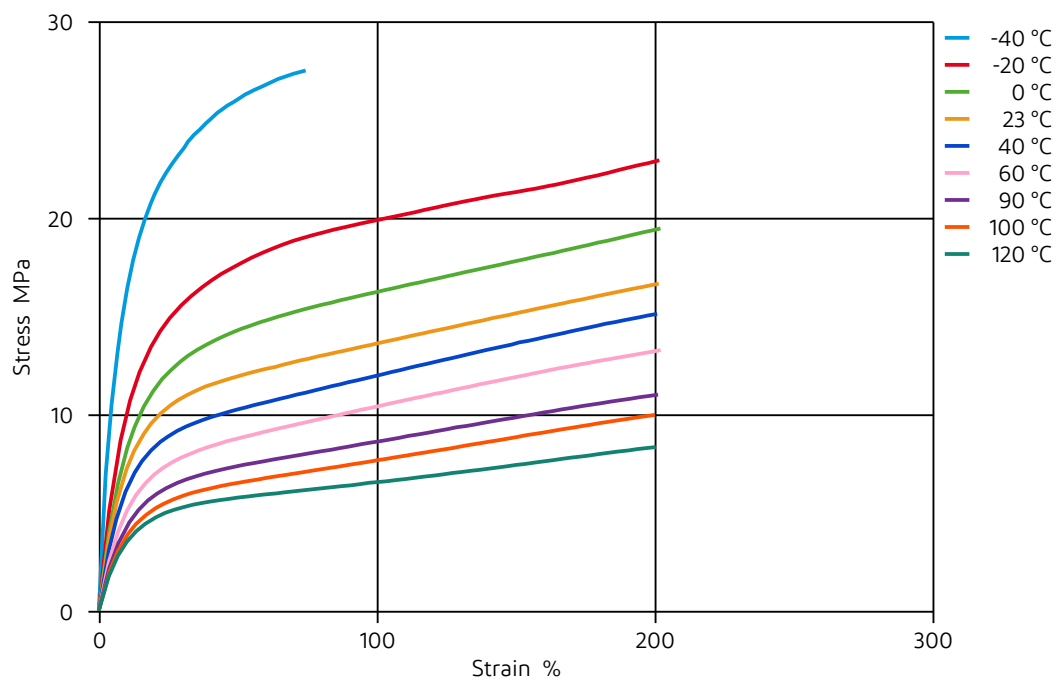

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✗ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✗ Motor oil OS206 304 Ref.Eng.Oil, ISP, 135°C
- ✗ Automatic hypoid-gear oil Shell Donax TX, 135°C
- ✗ Hydraulic oil Pentosin CHF 202, 125°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C



Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✓ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✗ DOT No. 4 Brake fluid, 130°C
- ✗ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✗ Water, 90°C
- ✓ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.